



Intermec

Product Profile

- Dual technology design augments bar code with RFID reading and programming capability
- LCD display and mode key for maximum application flexibility
- Optional "Smart" battery pack with integral charger for use with PDT
- Fast setup using EasySet™ software for Windows
- Durable design withstands the harshest environments



SABRE® 1555 HANDHELD SCANNER & RFID PROGRAMMER / DECODER

The Sabre 1555 scanner simplifies data collection by combining two technologies into one: it reads bar codes and it reads and programs radio frequency identification (RFID) tags. It also incorporates a laser scan engine for reliable bar code scanning and an RFID interrogator for reading RFID tags up to 2 meters (six feet) away. The interrogator can read single or multiple tags, and can program any Intellitag® RFID tag. The Sabre 1555 is also the first handheld RFID reader to support ANS NCITS 256-1999, the only approved standard for RFID item management.

At 16 ounces, the scanner is lightweight and ergonomically designed for comfortable scanning over an entire shift. It's also rugged enough to withstand the harshest working environments. Its 40-character display, audio feedback, and single-mode key make operation easy and reduce training time.

The Sabre 1555's lithium ion battery option allows the 1555 to operate with a variety of portable data terminals (PDT) without consuming battery power from the PDT. Each lithium ion battery pack has an integrated charger, eliminating the need for a separate charger.

The Sabre 1555 features EasySet™, Intermec's Windows-based scanner configuration software. In off-line mode, EasySet makes it easy to construct and print a page of set-up bar codes that users scan to configure one or more scanners. With EasySet, the scanner is up and running in a matter of minutes. In addition, the scanner can be reconfigured in real time by the host, giving the user total control.

By combining easy set-up and standard terminal interfaces (RS 232 or USB), the Sabre 1555 is a new generation in handheld scanning technology and performance.



Intermec

Physical Characteristics

Scanner Length: 14.61 cm (5.75")
Scanner Height: 22.23 cm (8.75")
Scanner Width: 8.89 cm (3.5")
Scanner Weight: 600 g (16 oz.)
 including battery

Optics System

Visible laser diode: 650nm±10nm
 USA/Canada Class II
 International Class 2
Scan rate: 36±3 scans per second

Optical Parameters

Pitch: ±65° from normal
Skew: ±55° from normal
Depth of field-Long Range*:

Mil	cm	Inch
10	27.9-98.3cm	11-19"
15	20.3-83.8cm	8-33"
20	20.3-96.5cm	8-38"
40	22.9-190.5cm	9-75"
55	22.9-203cm	9-80"
70**	190.5-408.9cm	75-161"
100**	210.8-530.9cm	83-209"

Depth of field-Standard Range*:

Mil	cm	Inch
5	7.4-11.2cm	2.9-4.4"
7.5	4.8-18.8cm	1.9-7.4"
10	4.6-22.9cm	1.8-9"
15	3.8-35.6cm	1.5-14"
20	5.1-48.3cm	2-19"
40	10.2-78.7cm	4-31"
55	16.5-88.9cm	6.5-35"

*Depth of field measured using Code 39, ANSI Grade A

** Reflective

Print Contrast

Minimum 40% reflectance difference (long range). Minimum 25% reflectance difference (high visibility)

Ambient Light Immunity

Immune to direct exposure from office level lighting and sunlight

Environment

Operating Temperature: 0° to 50°C (32° to 122°F)
Storage Temperature: -20° to 70°C (-4° to 158°F)
Battery Storage Temperature: -30° to 60° C (-22° to 140°F)
Humidity: 0-95% non-condensing
Shock: 26 four foot drops to concrete
Vibration: Class 3 SAE off-road vehicle specification
Environmental: Scanner sealed against windblown rain and dust (IEC 529 rated at IP54).
ESD: Conforms to 12 KV rating per IEC 801-2
EMI Emissions: Conforms to Class A FCC Part 15, RSS 210 and CISPR 22 Class B
Approvals: UL & cUL listed, C22.2 No. 950/UL 1950, TUV Rheinland GS Licensed EN 60950, EN 60825-1, CE marked, C-Tick marked

Battery Packs

1200 mA 90-135 VAC, 50Hz/60Hz, Lithium Ion with integral charger and 4 hour charge time

Accessories

2-bay and 6-bay charge strips for battery packs available, holster and belt.

Communications

Frequency: 2450 MHz or 915 MHz
 unlicensed FCC spread-spectrum frequency-hopping

Host Interfaces

RS-232 Serial

Software Features

Protocols: RFID reader/programmer software fully supports the ANSI NCITS 256 - 1999 for item management

Configuration

Setup via EasySet System software for Windows. Print and scan a bar code menu or download a configuration via flash memory

Data Rate

Read 8 bytes of data from a tag in less than 12 ms
 Write a single byte of data to a tag in less than 25 ms

Multitag Access (Filtering)

User-specified groups within a population of tags can be selected, read from, and/or written to using multitag access commands.

Power Requirements

8.5 VDC without battery option

Options

Rechargeable battery pack for portable data terminal applications

Read/Write Performance

Read/write performance varies with RFID inserts, tags, and frequency configurations.

Read/Write Ranges

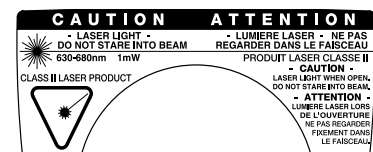
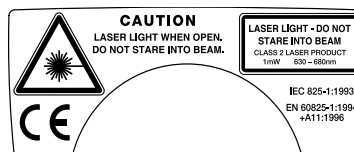
Write ranges are approximately 60% of the effective read ranges of the RFID inserts.

Read Range Examples

Ranges are listed below for RFID inserts using frequency-hopping FCC unlicensed operation reader and free space dipole tag

2 Meters (6.56 ft): 915.0 MHz 45 x 85 x 1 mm 1.77 x 3.35 x .04 in) RFID insert

0.6 Meters (1.97 ft): 2450 MHz 10 x 60 x .5 mm (.39 x 2.36 x .02 in) RFID insert

**North America**

Corporate Headquarters
 6001 36th Avenue West
 Everett, Washington 98203
 tel: 425.348.2600
 fax: 425.355.9551

Systems & Solutions

550 2nd Street S.E.
 Cedar Rapids, Iowa 52401
 tel: 319.369.3100
 fax: 319.369.3453

Media Supplies

9290 Le Saint Drive
 Fairfield, Ohio 45014
 tel: 513.874.5882
 fax: 513.874.8487

Europe/ Middle East & Africa

Headquarters
 Sovereign House
 Vastern Road
 Reading, Berkshire RG1 8BT
 United Kingdom
 tel: +44.118.987.9400
 fax: +44.118.987.9401

Asia

Hong Kong
 2602 Convention Plaza
 Office Tower
 1 Harbor Road
 Wanchai, Hong Kong
 tel: 852.2574.9777
 fax: 852.2574.9725

Singapore

25-16 International Plaza
 10 Anson Road, 079903
 tel: 65.324.8391
 fax: 65.324.8393

Australia

Level 7, 200 Pacific Highway
 Crows Nest NSW 2065
 Australia
 tel: 61.2.9492.4400
 fax: 61.2.9954.6300

South America & Mexico

Latin America Headquarters
 17921 B Skypark Circle
 Irvine, California 92614
 tel: 949.442.9393
 fax: 949.757.1687

Mexico

Tamulipas 141, Primero Piso
 06140 Mexico, D.F.
 tel: 525.55.211.1919
 fax: 525.55.211.8121

Worldwide

Fax Document Retrieval Service
 800.755.5505
 (North America Only)
 tel: 650.556.8447

Internet

www.intermec.com

Sales

800.347.2636
 (toll free in N.A.)
 tel: 425.348.2726

Service and Support

800.755.5505
 (toll free in N.A.)
 tel: 425.356.1799

Copyright © 2002 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 608890-01C 04/02

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.